



Main Features:


- DLP has a hexagon bolt (RFID prepared) to disassemble/assemble with a wrench easily
- “Stay-up” function for easy on-hooking when there is limited space
- Ideal for narrow spaces, such as corners or edge position, angular lifts, tilting under load, multiple part lift
- Identification markings for traceability, Working Load Limit, mounting torque and manufacturer’s identification
- Safety factor 4:1
- Bolt, nut and washer according to: ISO 898-1 Class 10.9



Specifications –

Standard Thread Length:


Bullivants Mfr No.	M Inch	B mm	C mm	D mm	E mm	F mm	G mm	L mm	L1 mm	X mm	Y mm	Z mm	Weight kg
WRB-0035-079-CP-Z102308	5/16	35	48	10	39	14	10	13	78	30	55	26	0.3
WRB-0060-095-CP-Z102310	3/8	35	48	10	39	14	10	13	78	30	55	26	0.3
WRB-0100-127-CP-Z102312	1/2	35	48	12	51	20	14	23	91	44	59	32	0.5
WRB-0160-158-CP-Z102316	5/8	35	48	12	51	20	14	23	91	44	59	32	0.5
WRB-0220-190-CP-Z102320	3/4	54	88	18	71	28	18	34	145	58	90	48	1.6
WRB-0260-222-CP-Z102321	7/8	54	88	18	71	28	18	34	145	58	90	48	1.7
WRB-0410-254-CP-Z102324	1	54	88	18	71	28	18	34	145	58	90	48	1.7
WRB-0500-317-CP-Z102330	1- 1/4	82	94	26	104	39	27	53	182	88	122	75	5.5
WRB-0700-381-CP-Z102336	1- 1/2	82	94	26	104	39	27	53	182	88	122	75	5.7
WRB-1500-444-CP-Z102342	1- 3/4	100	103	36	136	54	34	73	216	113	156	110	12.3
WRB-2000-508-CP-Z102348	2	100	103	36	136	54	34	73	216	113	156	110	12.6

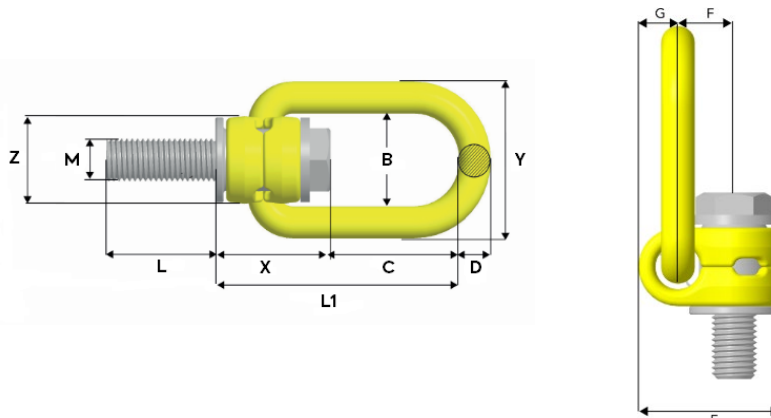



Specifications – Long Thread Length:

Bullivants Mfr No.	M Inch	B mm	C mm	D mm	E mm	F mm	G mm	L1 mm	L2 mm	X mm	Y mm	Z mm	Weight kg
WRB-0035-079-CP-Z102308L	5/16	35	48	10	39	14	10	78	97.5	30	55	26	0.3
WRB-0060-095-CP-Z102310L	3/8	35	48	10	39	14	10	78	97.5	30	55	26	0.3
WRB-0100-127-CP-Z102312L	1/2	35	48	12	51	20	14	91	118	44	59	32	0.5
WRB-0160-158-CP-Z102316L	5/8	35	48	12	51	20	14	91	158	44	59	32	0.5
WRB-0220-190-CP-Z102320L	3/4	54	88	18	71	28	18	145	198	58	90	48	1.6
WRB-0260-222-CP-Z102321L	7/8	54	88	18	71	28	18	145	238	58	90	48	1.7
WRB-0410-254-CP-Z102324L	1	54	88	18	71	28	18	145	238	58	90	48	1.7
WRB-0500-317-CP-Z102330L	1- 1/4	82	94	26	104	39	27	182	295	88	122	75	5.5
WRB-0700-381-CP-Z102336L	1- 1/2	82	94	26	104	39	27	182	295	88	122	75	5.7
WRB-1500-444-CP-Z102342L	1- 3/4	100	103	36	136	54	37	216	293	113	156	110	12.3
WRB-2000-508-CP-Z102348L	2	100	103	36	136	54	34	216	293	113	156	110	12.6

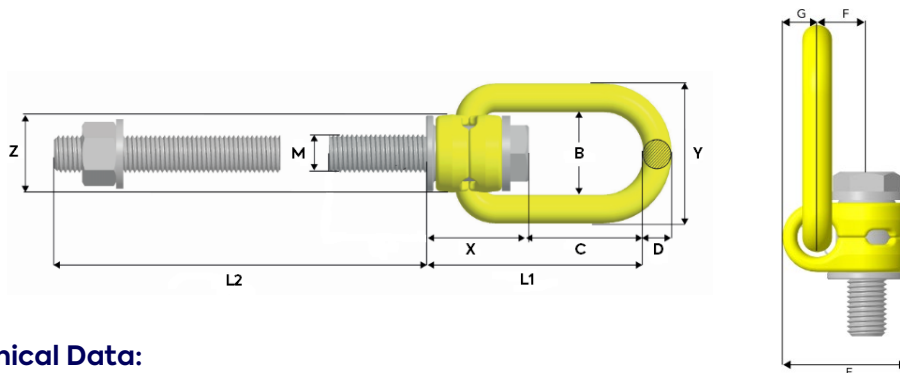

Technical Data:

Symmetric Load tonnes								
No. of legs	1		2		2 Symmetric		3&4 Symmetric	
Angle β	$0^\circ < \beta < 90^\circ$		$0^\circ < \beta < 90^\circ$		$0-45^\circ$	$45-60^\circ$	$0-45^\circ$	$45-60^\circ$
								Tightening Torque ft. Lbs
WRB-0035-079-CP-Z102308(L)	0.35		0.70		0.5	0.35	0.7	7
WRB-0060-095-CP-Z102310(L)	0.60		1.20		0.8	0.60	1.3	11
WRB-0100-127-CP-Z102312(L)	1.0		2.0		1.4	1.0	2.1	20
WRB-0160-158-CP-Z102316(L)	1.6		3.2		2.2	1.6	3.3	44
WRB-0220-190-CP-Z102320(L)	2.2		4.4		3.0	2.2	4.6	66
WRB-0260-222-CP-Z102321(L)	2.6		5.2		3.5	2.6	5.4	66
WRB-0410-254-CP-Z102324(L)	4.1		8.2		5.7	4.1	8.6	100
WRB-0500-317-CP-Z102330(L)	5.0		10.0		7.0	5.0	10.5	200
WRB-0700-381-CP-Z102336(L)	7.0		14.0		9.8	7.0	14.7	236
WRB-1500-444-CP-Z102342(L)	15.0		30.0		21.0	15.0	31.5	440
WRB-2000-508-CP-Z102348(L)	20.0		40.0		28.0	20.0	42.0	590

* Safety factor 4: 1