

Bullivants


Veropower 8 1960 Grade



Veropower 8 1960 Tensile Grade is a rotary swaged 8-strand rope in a parallel lay construction with compacted outer strands and a rope core covered with a plastic layer.

Main Features:

- Very stable rope structure and achieves good bending fatigue
- Offers superior crushing resistance and excellent resistance to abrasion
- Excellent spooling behaviour on multilayer drums
- May not be used with a swivel
- Ideal for hoist rope, luffing rope, trolley rope, crowd winch rope, crowd rope and grab rope
- Complies with AS 3569:2016

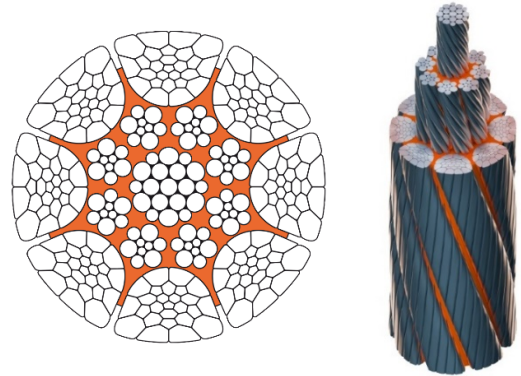

Specifications:

Bullivants Mfr No.	Diameter mm	Approx. Weight kg/m	Minimum Breaking Load kN
W0120NRDA	12	0.717	147.40
W0140NRDA	14	0.976	200.60
W0160NR3A	16	1.275	262.00
W0180NRDA	18	1.614	331.60
W0220NRDA	22	2.411	495.30

Applications:

Jib Crane: **Hoist Rope**




Overhead Crane: **Hoist/Auxiliary Hoist Rope**




Ladle Crane: **Hoist/Auxiliary Hoist Rope**



Foundation Equipment: **Feed Unit**



Gantry Crane: **Luffing Rope**




Mobile/Telescopic Crane: **Luffing Rope**




Crawler Crane: **Luffing/ Boom Hoist/ Pendant Rope**




Offshore Crane: **Luffing Rope**



Luffing Crane: **Luffing/ Pendant Rope**



Harbor Mobile Crane: **Hoist/ Grab Rope**



Deck Crane/ Unloader: **Luffing/ Grab Rope**



Tower Crane: **Trolley/ Pendant Rope**

