




Main Features:

- Manufactured to DIN 580 standard lifting eyebolt specification
- Hot-dip galvanised finish provides good corrosion resistance for general outdoor use
- Designed for lifting, rigging, and securing loads
- Metric threaded shank for installation into tapped holes or threaded components
- Must be fully seated and tightened flush against the mounting surface
- Eye designed to align with direction of load for safe lifting
- Commercial grade carbon steel construction for strength and durability
- Widely used in machinery handling, fabrication, and maintenance applications
- Requires regular inspection for deformation, thread damage, or corrosion
- Not suitable for shock loading or dynamic lifting conditions
- Not Suitable for Lifting Applications

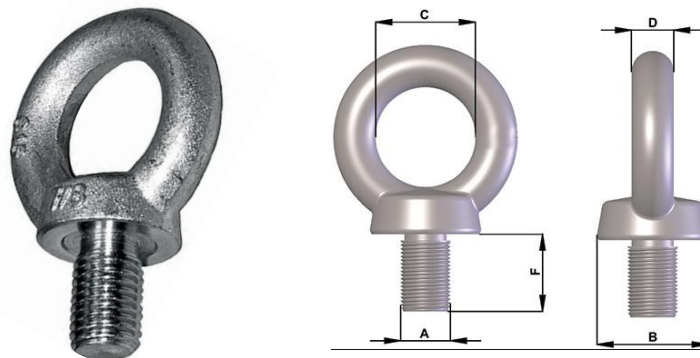

Specifications:

Bullivants Mfr No.	A mm	B mm	C mm	D mm	F mm
WEB-080-M-125P-Z-GP	M8	20	20	8	13
WEB-100-M-150P-Z-GP	M10	25	25	10	17
WEB-120-M-175P-Z-GP	M12	30	30	12	20
WEB-160-M-200P-Z-GP	M16	35	35	16	27
WEB-200-M-250P-Z-GP	M20	40	40	20	30
WEB-240-M-300P-Z-GP	M24	50	50	24	36
WEB-300-M-350P-Z-GP	M30	65	60	24	45
WEB-360-M-400P-Z-GP	M36	75	70	28	54
WEB-420-M-450P-Z-GP	M42	85	80	32	63

Not suitable for lifting