




Main Features:

- For use with Grade 100 chain
- 25% Stronger than Grade 80 equivalent
- Suitable for single leg or 2 leg slings
- Complies with AS 3776:2015

ZERO HARM Product Features:

- Grade 100 makes the process lighter and reduces the risk of potential manual handling injuries
- Hi Visibility Colour contrast
- Individually proof load tested to 2 x WLL
- Fatigue tested at 1.5 x WLL for 20,000 cycles
- 100% Magnaflux detection

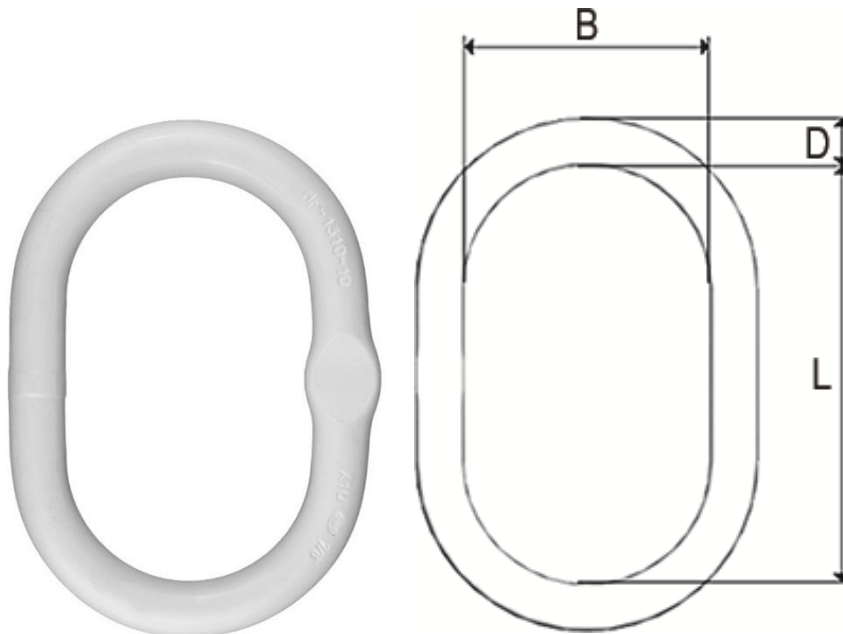

Specifications:

Bullivants Mfr No.	WLL tonne	D mm	B mm	L mm	Weight kg
WMAL-08/06-R-MF+W	2.5	14	70	125	0.4
WMAL-10/08-G-MF+W	4.0	17	80	140	0.8
WMAL-13/10-G-MF+W	6.7	22	95	160	1.5
WMAL-16/13-G-MF+W	10.0	28	145	275	3.9