

Bullivants

Rotating Lifting Point (RLP)

Metric & Imperial Threads



Main Features:

- RLP bow rotates 360° and pivots 180°, making it strong, flexible and reliable
- Easy assembly of roundslings, master links or hooks directly to the lifting point
- Open and spacious D-ring makes disassembly easy and facilitates inspection of all parts as well as replacement of the bolt
- The hexagon bolt makes it easy to mount and dismount the RLP
- Proof tested 2.5 times WLL




Specifications – Metric Thread:

Bullivants Mfr No.	M	B mm	C mm	D mm	L mm	L1 mm	X mm	Y mm	Z mm	Weight kg
WRB-0030-M08-CP-RLP	M8	42	35	12	16	62	27	64	Ø40	0.3
WRB-0050-M10-CP-RLP	M10	42	35	12	16	62	27	64	Ø40	0.3
WRB-0075-M12-CP-RLP	M12	57	46	19	25	88	42	91	Ø54	1.0
WRB-0150-M16-CP-RLP	M16	57	46	19	25	88	42	91	Ø54	1.0
WRB-0250-M20-CP-RLP	M20	83	55	28	36	110	55	133	Ø80	2.9
WRB-0350-M24-CP-RLP	M24	83	55	28	36	110	55	133	Ø80	2.9
WRB-0600-M30-CP-RLP	M30	114	70	34	58	148	78	182	Ø111	7.1
WRB-0800-M36-CP-RLP	M36	114	70	34	58	148	78	182	Ø111	7.3
WRB-1400-M42-CP-RLP	M42	149	91	40.4	81	190	99	229	Ø142	14.3
WRB-1600-M48-CP-RLP	M48	149	91	40.4	81	190	99	229	Ø142	14.5

Specifications – Imperial Thread:

Bullivants Mfr No.	M inch	B mm	C mm	D mm	L mm	L1 mm	X mm	Y mm	Z mm	Weight kg
WRB-0120-096-CP-Z101810	3/8	42	35	12	16	62	27	64	Ø40	0.3
WRB-0200-127-CP-Z101812	1/2	57	46	19	25	88	42	91	Ø54	1.0
WRB-0320-158-CP-Z101816	5/8	57	46	19	25	88	42	91	Ø54	1.0
WRB-0500-190-CP-Z101820	3/4	83	55	28	36	110	55	133	Ø80	2.9

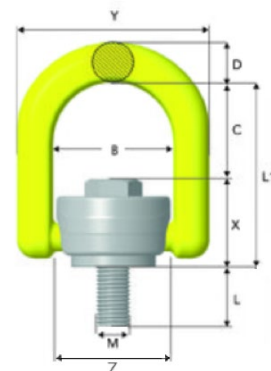



Technical Data:

Symmetric Load (tonnes)									
No. of legs	1	1	2	2	2 Symmetric		3 & 4 Symmetric		
Angle β	0°	90°	0°	90°	0-45°	45-60°	0-45°	45-60°	Tightening Torque Nm
WRB-0030-M08-CP-RLP	0.8	0.4	1.6	0.8	0.5	0.4	0.8	0.6	10Nm
WRB-0050-M10-CP-RLP	1.2	0.7	2.4	1.4	0.9	0.7	1.4	1.0	15Nm
WRB-0120-096-CP-Z101810	1.2	0.65	2.4	1.3	0.9	0.6	1.3	0.9	11Ft.Lbs
WRB-0075-M12-CP-RLP	2.0	1.2	4.0	2.4	1.6	1.2	2.5	1.8	27Nm
WRB-0200-127-CP-Z101812	2.0	1.2	4.0	2.4	1.6	1.2	2.5	1.8	20 Ft.Lbs
WRB-0150-M16-CP-RLP	3.2	2.0	6.4	4.0	2.8	2.0	4.2	3.0	60Nm
WRB-0320-158-CP-Z101816	3.2	2.0	6.4	4.0	2.8	2.0	4.2	3.0	44 Ft.Lbs
WRB-0250-M20-CP-RLP	5.6	2.8	11.2	5.6	3.9	2.8	5.8	4.2	90Nm
WRB-0500-190-CP-Z101820	5.0	2.5	10.0	5.0	3.5	2.5	5.2	3.7	66Ft.Lbs
WRB-0350-M24-CP-RLP	9.2	4.6	18.4	9.2	6.4	4.6	9.6	6.9	135Nm
WRB-0600-M30-CP-RLP	12.0	6.0	24.0	12.0	8.4	6.0	12.6	9.0	270Nm
WRB-0800-M36-CP-RLP	14.0	8.0	28.0	16.0	11.2	8.0	16.8	12.0	320Nm
WRB-1400-M42-CP-RLP	16.0	14.0	32.0	28.0	19.6	14.0	29.4	21.0	600Nm
WRB-1600-M48-CP-RLP	20.0	16.0	40.0	32.0	22.4	16.0	33.6	24.0	800Nm

* Safety factor 4: 1

