


Bullivants

Superbuckles Jaw & Jaw Galvanised



Main Features:

- Hot dipped galvanised steel
- End fittings are quenched and tempered; bodies heat treated by normalising
- Turnbuckles recommended for straight on in-line pull only
- Proof load 2.5 x WLL
- Ultimate load 5 x WLL

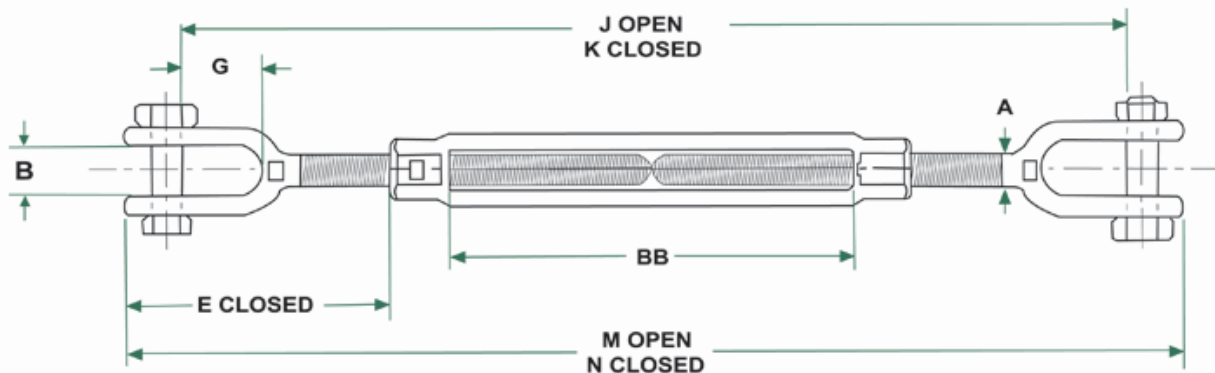

Specifications:

Bullivants Mfr No.	Dimensions mm											Unit Weight kg
	Thread Dia & take up inch	WLL t	A	B	E	G	J Open	K Closed	M Open	N Closed	BB	
WTB-T-100-JJ-G-6INT	3/8 x 6	0.5	9.65	13.7	54	22	410	258	441	289	152	0.37
WTB-T-127-JJ-G-12INT	1/2 x 12	1.0	12.7	16.5	70	27	775	444	813	483	305	1.09
WTB-T-158-JJ-G-12INT	5/8 x 12	1.5	16	20	89	33	814	477	867	530	305	1.77
WTB-T-190-JJ-G-12INT	3/4 x 12	2.3	19	23.8	106	38	850	508	917	574	305	2.8
WTB-T-222-JJ-G-12INT	7/8 x 12	3.2	22	28.7	123	44	890	542	967	618	305	3.7
WTB-T-254-JJ-G-12INT	1 x 12	4.5	25	34	140	52	933	577	1017	662	305	5.9
WTB-T-317-JJ-G-12INT	1 1/4 x 12	6.9	32	44.5	183	71	1012	643	1118	750	305	9.3

1300 LIFTING

info@bullivants.com
www.bullivants.com