

VLBS

Loading Ring for Welding



Distributed by

Bullivants




Full WLL in any direction
with 4:1 design factor

100% electro-magnetic
crack detection tested

Clear marking of the WLL



Product features / VLBS Load ring




- ✓ Full WLL in any direction with 4:1 design factor
- ✓ 100% electro-magnetic crack detection tested
- ✓ Manufactured using high tensile CrNiMo - steel
- ✓ Rated capacity can be increased 100% in specific lashing applications

- ✓ Available with or without internal position holding springs
- ✓ Test certificates available
- Painted in the unique durable RUD pink powder coat finish

| TYPE | WLL [t] | A | B | C | D | E | F | G | H | T | Weld HV $\pm \Delta a$ | WEIGHT [kg] | Ref. No. |
|------------|---------|----|-----|----|-----|-----|------|----|----|-----|------------------------|-------------|----------|
| VLBS - 1.5 | 1.5 | 33 | 66 | 25 | 38 | 40 | 14 | 33 | 14 | 65 | HV 5 ± 3 | 0.35 | 7993035 |
| VLBS - 2.5 | 2.5 | 36 | 77 | 27 | 45 | 48 | 16 | 40 | 14 | 75 | HV 7 ± 3 | 0.5 | 7994830 |
| VLBS - 4 | 4.0 | 42 | 87 | 31 | 51 | 52 | 18 | 46 | 16 | 83 | HV 8 ± 3 | 0.8 | 7993036 |
| VLBS - 6.7 | 6.7 | 61 | 115 | 44 | 67 | 73 | 24 | 60 | 22 | 117 | HV 12 ± 4 | 1.9 | 7993037 |
| VLBS - 10 | 10.0 | 75 | 129 | 55 | 67 | 71 | 26.5 | 60 | 26 | 126 | HV 16 ± 4 | 2.9 | 7993040 |
| VLBS - 16 | 16.0 | 96 | 190 | 69 | 100 | 105 | 40 | 90 | 26 | 174 | HV 25 ± 6 | 6.8 | 7993041 |

Dimensions and specifications subject to change

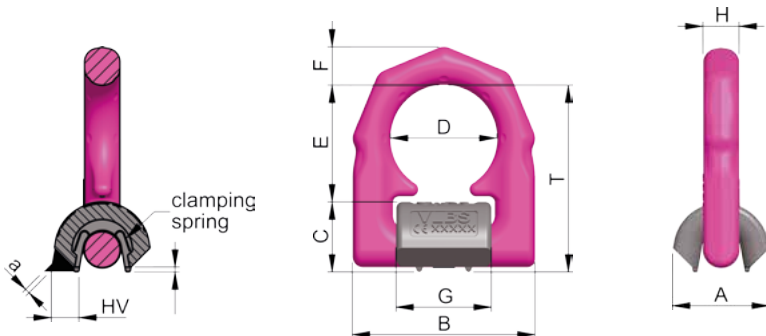

Distributed by **Bullivants**
1300 LIFTING info@bullivants.com



Full Member

Quality ISO 9001

Environment ISO 9001

ISO 45001 Occupational Health and Safety

SAI GLOBAL