

Bullivants

Chain Block Range



Bullivants Chain Blocks are manufactured from the highest quality materials and equipped with the latest technology. This compact design includes improved features to make the chain block safer and easier to use ensuring a long service life.

Main Features:

- Improved braking performance to ensure the integrity of the load under all conditions
- Overload Limiting devices also available to improve safety
- Stainless Steel ID plates and rivets suitable for underground applications
- Improved design of load sprockets for safer operation
- Key internal components including gearing and sprockets are CNC machined for improved overall product reliability and longer life
- Thrust bearing bottom swivel hook enables swivelling under load
- Supplied with test certificate
- Designed in accordance with EN 13157 and AS 1418.2
- Complies with AS 1418.2

ZERO HARM Product Features:

- Improved design of load sprockets for safer operation
- Load hooks with 'notched' safety latches increase service life of the latches and improve the safety of the lifting operation
- All Bullivants Chain Blocks are individually load tested in accordance with Australian Standards and supplied with individual test certificate



Bullivants

Chain Block Range



Chain blocks are fitted as standard twin pawl ratchets for 100% engagement in the unlikely event of a spring or pawl failure.



Brake efficiency – Bullivants chain blocks have a brake engagement force at a maximum of 3% WLL preventing any slippage due to light load conditions.



Improved load chain zinc plated alloy steel designed in accordance to EN818-7.



Load hooks fitted with 'notched' safety latches to increase service life of the latches and improve the safety of the lifting operation.

New design thrust bearing swivel hook for improved durability.



Stainless steel ID plates and rivets suitable for underground applications.

QR code access to User Manual.



Key internal components including gearing and sprockets are CNC machined for improved overall product reliability and longer life.

All Bullivants Chain Blocks are individually load tested in accordance with Australian Standards and supplied with individual test certificate

Bullivants

Chain Block Range



Specifications:


Bullivants Mfr No.		Rated Capacity (Kg)	Lifting height (m)	Test load (kN)	Hand force fully loaded (N)	No. of chain falls	Load Chain Grade 80 (mm)	Hand chain (mm)	Headroom (mm)	Dimensions (mm)				Net Weight (Kg)
Non-Overload Protection	Overload Protection								H	A	B	C	D	
WCB-0050-030-BV-015	WCB-0050-030-BVOLP-015	500	3.0	6.13	240	1	5 x 15	5 x 23.7	345	148	132	23	35	8.9
WCB-0050-030-BV-025	WCB-0050-030-BVOLP-025	500	3.0	6.13	240	1	5 x 15	5 x 23.7	345	148	132	23	35	9.3
WCB-0050-060-BV-055	WCB-0050-060-BVOLP-055	500	6.0	6.13	240	1	5 x 15	5 x 23.7	345	148	132	23	35	13.2
WCB-0100-030-BV-015	WCB-0100-030-BVOLP-015	1,000	3.0	12.25	250	1	6 x 18	5 x 23.7	376	172	151	26	40	11.9
WCB-0100-030-BV-025	WCB-0100-030-BVOLP-025	1,000	3.0	12.25	250	1	6 x 18	5 x 23.7	376	172	151	26	40	12.3
WCB-0100-060-BV-055	WCB-0100-060-BVOLP-055	1,000	6.0	12.25	250	1	6 x 18	5 x 23.7	376	172	151	26	40	17.3
WCB-0200-030-BV-025	WCB-0200-030-BVOLP-025	2,000	3.0	24.50	335	1	8 x 24	5 x 23.7	470	210	175	34	50	19.8
WCB-0200-060-BV-055	WCB-0200-060-BVOLP-055	2,000	6.0	24.50	335	1	8 x 24	5 x 23.7	470	210	175	34	50	26.6
WCB-0300-030-BV-025	WCB-0300-030-BVOLP-025	3,000	3.0	36.75	280	2	7 x 21	5 x 23.7	580	230	173	39	55	25.8
WCB-0300-060-BV-055	WCB-0300-060-BVOLP-055	3,000	6.0	36.75	280	2	7 x 21	5 x 23.7	580	230	173	39	55	35
WCB-0500-030-BV-025	WCB-0500-030-BVOLP-025	5,000	3.0	62.50	380	2	10 x 30	5 x 23.7	690	280	189	46	65	41.6
WCB-0500-060-BV-055	WCB-0500-060-BVOLP-055	5,000	6.0	62.50	380	2	10 x 30	5 x 23.7	690	280	189	46	65	57.4
WCB-1000-030-BV-025	-	10,000	3.0	122.25	385	4	10 x 30	5 x 23.7	780	385	189	50	85	71.5
WCB-1000-060-BV-055	-	10,000	6.0	122.25	385	4	10 x 30	5 x 23.7	780	385	189	50	85	100.5
WCB-2000-030-BV-025	-	20,000	3.0	245.00	400X2	8	10 x 30	5 x 23.7	980	640	226	80	110	163.6

Bullivants


Chain Block Range




Technical Drawings:

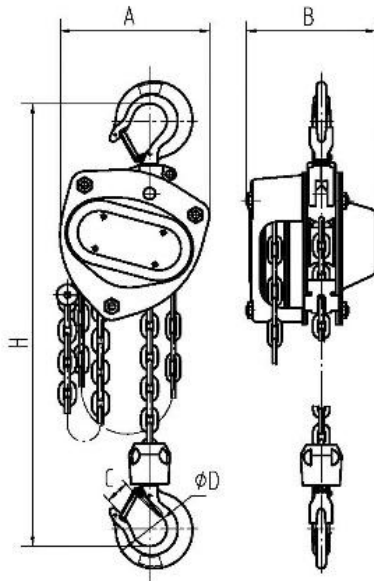


500kg – 2t

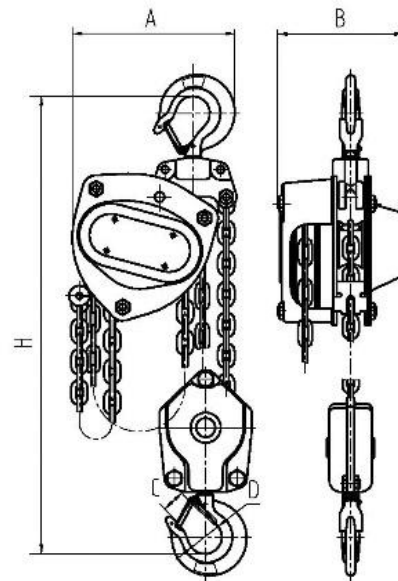

3t – 5t

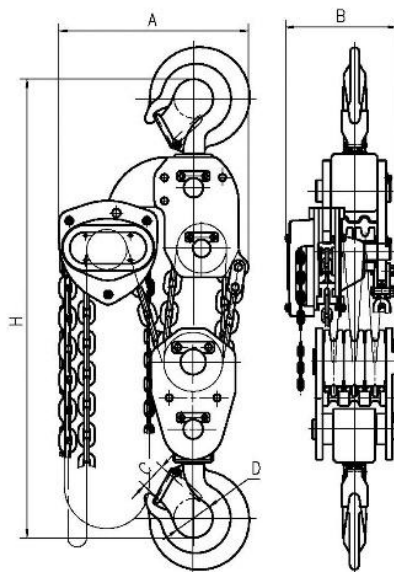

10t

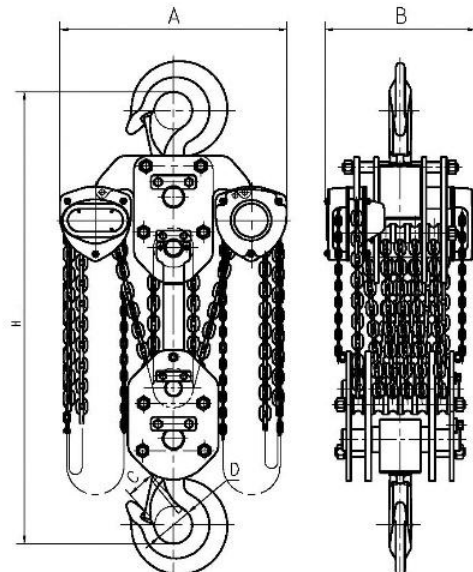

20t

Bullivants

Chain Block Range



Latch Kits:

Suitable for WLL hooks	Description	BV Item Code
0.5t	LATCH KIT FOR 0.5T BV & BVOLP HOIST HOOK	WCBP-BVOLP-LK-0050
1.0t	LATCH KIT FOR 1.0T BV & BVOLP HOIST HOOK	WCBP-BVOLP-LK-0100
2.0t	LATCH KIT FOR 2.0T BV & BVOLP HOIST HOOK	WCBP-BVOLP-LK-0200
3.0t	LATCH KIT FOR 3.0T BV & BVOLP HOIST HOOK	WCBP-BVOLP-LK-0300
5.0t	LATCH KIT FOR 5.0T BV & BVOLP HOIST HOOK	WCBP-BVOLP-LK-0500
10.0t	LATCH KIT FOR 9.0T & 10.0T BV HOIST HOOK	WCBP-BV-LK-1000
20.0t	LATCH KIT FOR 20.0T BV HOIST HOOK	WCBP-BV-LK-2000



Cast Steel Latch Kit, suitable for BV & BVOLP Hoist Hooks



Demonstration of
Overload Protection