




Main Features:

- For use with Grade 100 chain
- 25% Stronger than Grade 80 equivalent
- Suitable for two, three and four leg slings
- Complies with AS 3776

ZERO HARM Product Features:

- Grade 100 makes the process lighter and reduces the risk of potential manual handling injuries
- Hi Visibility Colour Contrast - White Powder coat finish
- Individually proof load tested to 2 x WLL
- Fatigue tested at 1.5 x WLL for 20,000 cycles
- 100% Magnaflux detection

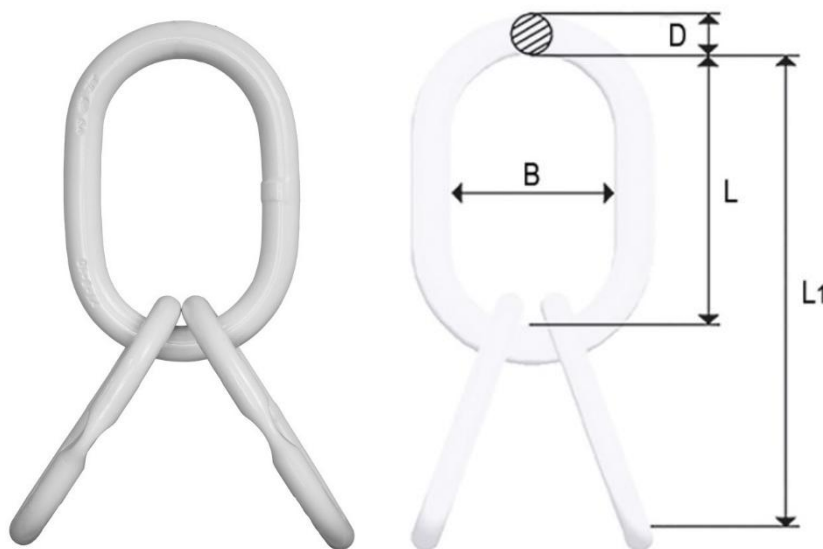

Specifications:

Bullivants Mfr No.	WLL tonne at 60 degree	B mm	D mm	L mm	L1 mm	Weight kg
WMAL-060-G-MT+W	2.4	80	17	140	260	1.5
WMAL-080-G-MT+W	4.3	95	22	160	300	3.0
WMAL-100-G-MT+W	6.9	145	28	275	435	6.8
WMAL-130-G-MT+W	11.6	145	32	275	465	10.9
WMAL-160-G-MT+W	17.3	140	40	270	545	18.4