




Main Features:

- Available in metric (coarse) and imperial (BSW) thread forms to suit different applications
- Manufactured from Grade 4 high-strength steel for lifting applications
- Designed for lifting, rigging, and load handling
- Complies with AS 2317 lifting standard
- Collared design allows for proper seating and improved load distribution
- Rated for both axial (in-line) and angular loading conditions with defined WLL values
- Higher capacity in vertical (axial) lifts, with reduced capacity when used at an angle
- Available in a range of thread sizes and lengths to suit lifting requirements
- Suitable for general industrial, construction, and engineering lifting applications
- Used for permanent or temporary lifting points on equipment and structures
- Requires correct thread matching (metric vs imperial) to ensure safe installation
- Must be fully tightened and seated flush against the load surface
- Eye should be aligned with the direction of load for safe lifting
- Not suitable for shock or dynamic loading conditions
- Load capacity reduces significantly under angular loading (refer load charts)
- Requires inspection prior to use for wear, deformation, or thread damage
- Commonly used in lifting systems, rigging setups, and load restraint applications (non-critical use unless engineered)

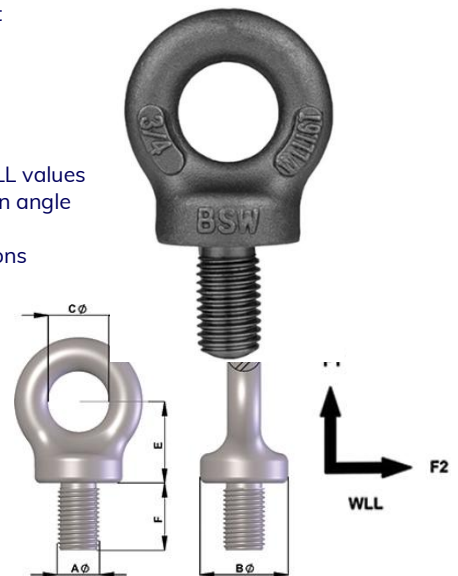

Specifications:

Coarse Thread		Fine Thread		AØ in.	WLL F1 t	WLL F2 t	BØ mm	CØ mm	DØ mm	E mm	F mm
Bullivants Mfr No.	Threads per in.	Bullivants Mfr No.	Threads per in.								
WEB-095-B-S-WLL	1.5	WEB-095-U-S-WLL	16	$\frac{3}{8}$	0.25	0.06	21	14	9	19	17
WEB-127-B-S-WLL	1.75	WEB-127-U-S-WLL	13	$\frac{1}{2}$	0.4	0.1	28	18	11	24	21
WEB-158-B-S-WLL	2.0	WEB-158-U-S-WLL	11	$\frac{5}{8}$	0.8	0.2	35	23	14	31	27
WEB-190-B-S-WLL	2.0	WEB-190-U-S-WLL	10	$\frac{3}{4}$	1.6	0.4	42	30	16	35	38
WEB-222-B-S-WLL	2.5	WEB-222-U-S-WLL	9	$\frac{7}{8}$	2.0	0.5	50	32	20	41	41
WEB-254-B-S-WLL	2.5	WEB-254-U-S-WLL	8	1	2.5	0.62	57	38	22	48	42
WEB-285-B-S-WLL	2.5	WEB-285-U-S-WLL	7	$1\frac{1}{8}$	4.0	1.0	71	49	27	65	52
WEB-317-B-S-WLL	3.0	WEB-317-U-S-WLL	7	$1\frac{1}{4}$	5.0	1.02	71	49	27	65	52
WEB-381-B-S-WLL	3.5	WEB-381-U-S-WLL	6	$1\frac{1}{2}$	7.0	1.75	87	53	35	73	64
WEB-444-B-S-WLL	3.5	WEB-444-U-S-WLL	5	$1\frac{3}{4}$	8.0	2.0	102	66	40	90	76
WEB-508-B-S-WLL	4.0	WEB-508-U-S-WLL	4.5	2	10	2.50	115	75	49	99	89
	4.0	WEB-635-U-S-WLL	4	$2\frac{1}{2}$	20	5.0	143	97	56	124	116
	4.5	WEB-762-U-S-WLL	4	3	30	7.50	163	106	66	140	125

Stamped with WLL F2

Other thread lengths and forms available on request

Testing and certification available on request