




Main Features:

- Flat woven construction
- Galvanised strand with alloy ferrules
- Can be wrapped around the cable or rope at any position, then secured with a wire 'lace'
- Commonly used in conjunction with tubular grips to bundle and bind loose cables together for more control in low tension hauls

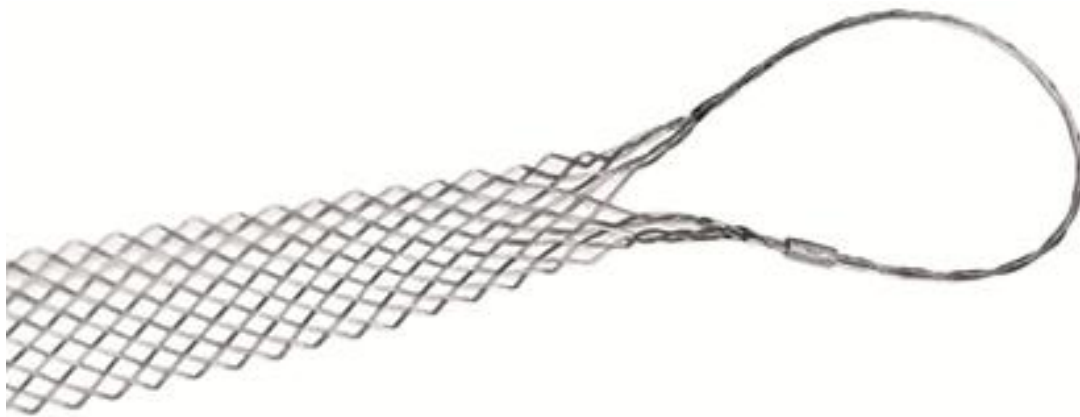

Specifications:

Bullivants Mfr No.	Size mm (Outside Diameter)	Grip Length mm	Ultimate Tensile Strength kN
WCPS-014-019-S1-NC	14 – 19	500	9
WCPS-019-028-S1-NC	19 – 28	600	15
WCPS-028-040-S1-NC	28 – 40	800	24
WCPS-040-055-S1-NC	40 – 55	900	35
WCPS-055-075-S1-NC	55 – 75	1000	62
WCPS-075-095-S1-NC	75 – 95	1200	98
WCPS-095-120-S1-NC	95 – 120	1400	98
WCPS-120-150-S1-NC	120 – 150	1600	141

Available with Copper Ferrules on request.

Available in Stainless Steel Strand variation on request.