




Main Features:

- Excellent corrosion resistance, particularly in marine and coastal environments
- Suitable for saltwater, humid, and chemically exposed conditions
- Non-rusting material – corrosion resistance is inherent in the material, not a coating
- Ideal for outdoor, marine, and washdown environments where longevity is required
- Commonly used with wire rope, chain, and rigging hardware attachment points
- Provides a clean, polished or passivated finish for improved appearance and durability
- Hygienic and easy to clean, suitable for food, pharmaceutical, or clean industries
- Low maintenance with long service life in harsh environments
- Resistant to pitting, crevice corrosion, and chloride attack compared to lower-grade materials
- Must be fully threaded and seated correctly to achieve rated performance
- Not suitable for shock or dynamic loading conditions
- Requires inspection for wear, deformation, or thread damage prior to use
- Commonly used in marine rigging, architectural, industrial, and general-purpose
- Applications (non-critical unless specified)

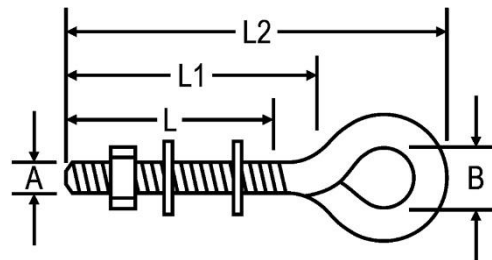

Specifications:

Bullivants Mfr No.	A mm	L mm	B mm	L1 mm	L2 mm
WSEB-060-040-319164	6	35	13	40	64
WSEB-060-HEB04PM060060	6	55	13	60	104
WSEB-060-080-319168	6	75	13	80	104
WSEB-060-HEB04PM060100	6	95	13	100	124
WSEB-080-HEB04PM080060	8	55	17	60	92
WSEB-080-HEB04PM080080	8	75	17	80	112
WSEB-080-100-3191810	8	95	17	100	132
WSEB-080-HEB04PM080130	8	125	17	130	162
WSEB-100-HEB04PM100080	10	75	21	80	119
WSEB-100-HEB04PM100100	10	95	21	100	139
WSEB-100-120-3191112	10	115	21	120	159
WSEB-100-HEB04PM100150	10	145	21	150	189
WSEB-120-HEB04PM120100	12	95	25	100	146
WSEB-120-HEB04PM120150	12	145	25	150	196

Not suitable for lifting