




Main Features:

- Excellent corrosion resistance, especially in marine and coastal environments
- Ideal for exposure to saltwater, chemicals, and harsh weather
- Non-rusting material (no coating required, corrosion resistance is inherent)
- Suitable for use in wet, humid, or chemically aggressive environments
- Attractive, polished finish for visible or aesthetic applications
- Low maintenance with long service life
- Resistant to pitting and crevice corrosion compared to lower-grade stainless
- Commonly used for general fastening, securing, and non-critical connections
- Suitable for applications where appearance and corrosion resistance are important

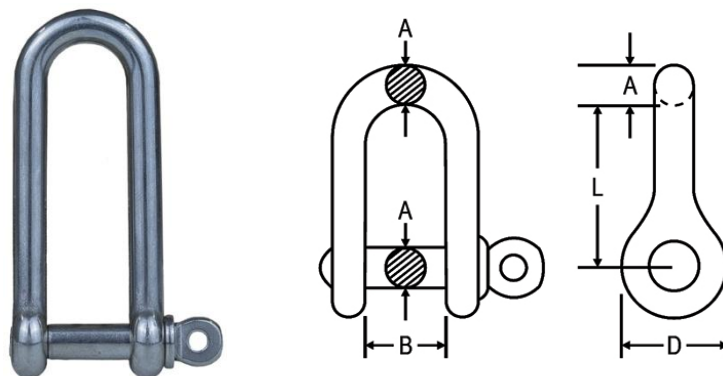

Specifications:

Bullivants Mfr No.	A mm	L mm	B mm	D mm	Weight kg
WSSS-040-L-HSH16LGM04	4	32	8	8	0.01
WSSS-050-L-HSH16LGM05	5	40	10	10	0.02
WSSS-060-L-HSH16LGM06	6	48	12	12	0.04
WSSS-080-L-HSH16LGM08	8	64	16	16	0.08
WSSS-100-L-HSH16LGM10	10	80	20	20	0.15
WSSS-120-L-HSH16LGM12	12	96	24	24	0.27

Not suitable for lifting