




### Main Features:

- Excellent corrosion resistance, especially in marine and coastal environments
- Ideal for exposure to saltwater, chemicals, and harsh weather
- Non-rusting material (no coating required, corrosion resistance is inherent)
- Suitable for use in wet, humid, or chemically aggressive environments
- Attractive, polished finish for visible or aesthetic applications
- Low maintenance with long service life
- Resistant to pitting and crevice corrosion compared to lower-grade stainless
- Commonly used for general fastening, securing, and non-critical connections
- Suitable for applications where appearance and corrosion resistance are important

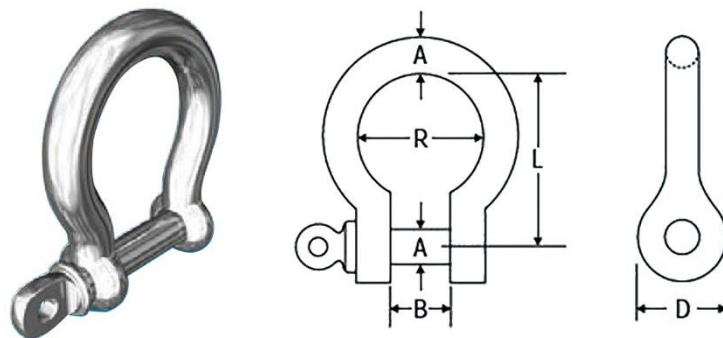

### Specifications:

| Bullivants Mfr No.    | A mm | L mm | B mm | R mm | D mm | Weight kg |
|-----------------------|------|------|------|------|------|-----------|
| WSSS-050-B-HSH16BWM05 | 5    | 20   | 8    | 17   | 10   | 0.02      |
| WSSS-060-B-HSH16BWM06 | 6    | 24   | 12   | 21   | 12   | 0.02      |
| WSSS-080-B-HSH16BWM08 | 8    | 32   | 16   | 28   | 16   | 0.07      |
| WSSS-100-B-HSH16BWM10 | 10   | 40   | 20   | 34   | 20   | 0.13      |
| WSSS-120-B-HSH16BWM12 | 12   | 48   | 24   | 42   | 24   | 0.21      |
| WSSS-160-B-HSH16BWM16 | 16   | 64   | 32   | 56   | 32   | 0.52      |

Not suitable for lifting