




Hot Dip Galvanising:

- Corrosion resistance (zinc coating protects steel) provides sacrificial protection ensuring the zinc coating corrodes instead of the base material.
- Longer service life, especially in outdoor or marine environments, also reduces the need for as frequent replacement and upkeep
- Full coverage, including threads and internal surfaces
- Provides resistance to abrasion and handling damage

Applications:

- General purpose tensioning and adjustment of cables, ropes, or wire
- Used to take up slack and maintain tension in non-critical applications
- Suitable for fencing, gates, and barrier systems
- Common in signage, shade structures, and light-duty bracing
- Used for securing and stabilising items where loads are minimal
- Allows easy adjustment of length and tension via threaded ends
- Often used in marine and outdoor settings (non-critical uses)
- Suitable for DIY, agricultural, and light industrial applications
- Typically used where precision load control is not required
- Not intended for lifting, overhead loads, or safety-critical applications

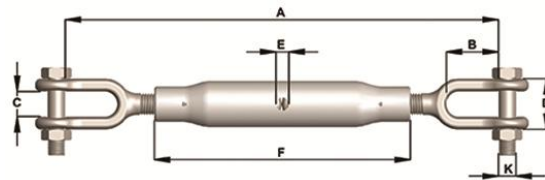

Specifications:

L		P		S		Size mm	A Closed mm	A Open mm	B mm	C mm	D mm	E mm	F mm	K mm
Bullivants Mfr No.	WLL t	Bullivants Mfr No.	WLL t	Bullivants Mfr No.	WLL t									
WRSC-100-JJ-L-G-T	0.3					M10	265	395	30	14	30	8.5	180	10
				WRSC-120-JJ-S-G-T	1.2	M12	340	510	30	19	37	9	229	10
WRSC-160-JJ-L-G-T	0.75	WRSC-160-JJ-P-G-A	1.6	WRSC-160-JJ-S-G-A	2.0	M16	360	535	45	20	40	9	230	12
WRSC-200-JJ-L-G-T	1.25	WRSC-200-JJ-P-G-A	2.5	WRSC-200-JJ-S-G-A	3.2	M20	390	520	40	22	44	11	229	16
		WRSC-240-JJ-P-G-A	4.0	WRSC-240-JJ-S-G-A	5.0	M24	545	795	52	32	60	13	356	22
		WRSC-270-M-JJ-P-G	6.3	WRSC-270-JJ-S-G-A	5.0	M27	590	805	65	32	60	13	365	22
		WRSC-330-M-JJ-P-G	10	WRSC-330-JJ-S-G-A	8.0	M33	640	870	76	38	76	14	381	24
		WRSC-390-JJ-P-G-A	12	WRSC-390-JJ-S-G-A	10	M39	700	960	90	47	87	16	407	32
		WRSC-450-JJ-P-G-A	16	WRSC-450-JJ-S-G-A	12	M45	755	975	111	51	101	17	407	36
		WRSC-480-JJ-P-G-A	20	WRSC-480-JJ-S-G-A	16	M48	790	975	121	51	101	19	407	42

Other sizes available on request