




Main Features:

- Stub ends, hook & eye, eye & eye end fittings available
- Excellent corrosion resistance, especially in marine and coastal environments
- Ideal for saltwater, humid, and chemically exposed conditions
- Non-rusting material (corrosion resistance is inherent, not a coating)
- Suitable for outdoor and wet applications where longevity is required
- Used for light-duty tensioning and adjustment of cables, ropes, or wire
- Maintains clean appearance with a polished or brushed finish
- Low maintenance with long service life
- Resistant to pitting and crevice corrosion compared to lower-grade materials
- Commonly used in marine rigging, balustrades, fencing, and architectural setups (non-critical use)

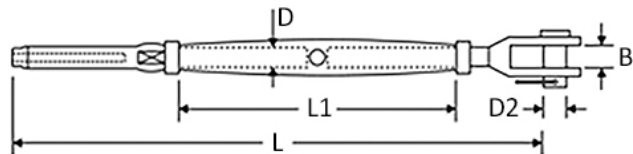

Specifications:

Bullivants Mfr No.	Size mm	Rope Ø mm	L1 mm	L mm	B mm	D2 mm	Weight kg
WSRS-050-JT-HRS16JSM0502.5	M5	2.5	80	155	7	5	0.05
WSRS-050-JT-HRS16JSM0503.2M	M5	3.2	45	105	8.5	5	0.04
WSRS-050-JT-HRS16JSM0503.2	M5	3.2	80	155	8.2	6	0.05
WSRS-060-JS-HRS16JSM06032	M6	3.2	95	175	8.2	6	0.08
WSRS-060-JS-HRS16JSM0604	M6	4	95	175	9.2	6	0.1
WSRS-080-JS-HRS16JSM0805	M8	5	105	205	11	8	0.15
WSRS-100-JS-HRS16JSM1006	M10	6	125	230	15	12	0.27

Not suitable for lifting