




Hot Dip Galvanising:

- Corrosion resistance (zinc coating protects steel) provides sacrificial protection ensuring the zinc coating corrodes instead of the base material.
- Longer service life, especially in outdoor or marine environments, also reduces the need for as frequent replacement and upkeep
- Full coverage, including threads and internal surfaces
- Provides resistance to abrasion and handling damage

Applications:

- Suitable for General Purpose fastening and securing applications, connecting chains, ropes or cable where lifting is not involved
- Temporary tie-downs for loads not being hoisted
- Suitable for use in barrier or partition set-ups
- Marine applications include attaching line, buoys, or anchors on non-critical loads
- Utility connections applications where failure would not pose a safety risk e.g. the load is not above the user or over valuable assets (signage/barriers)
- Available in Dee & Bow variations

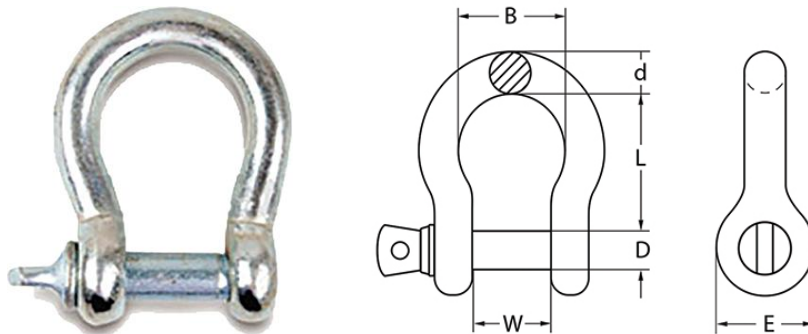

Specifications:

Bullivants Mfr No.	D mm	d mm	W mm	L mm	B mm	E mm
WSU-050-B-G	5	5	10	19	8	11
WSU-060-B-G	6	6	13	25	10	14
WSU-080-B-G	8	8	16	32	12	18
WSU-100-B-G	10	10	19	38	16	20
WSU-120-B-G	12	12	25	51	19	26
WSU-200-B-G	20	20	38	76	33	40
WSU-250-B-G	25	25	50	100	150	50

Not suitable for lifting