




Hot Dip Galvanising:

- Corrosion resistance (zinc coating protects steel) provides sacrificial protection ensuring the zinc coating corrodes instead of the base material.
- Longer service life, especially in outdoor or marine environments, also reduces the need for as frequent replacement and upkeep
- Full coverage, including threads and internal surfaces
- Provides resistance to abrasion and handling damage

Applications:

- General purpose tensioning and adjustment of cables, ropes, or wire
- Used to take up slack and maintain tension in non-critical applications
- Suitable for fencing, gates, and barrier systems
- Common in signage, shade structures, and light-duty bracing
- Used for securing and stabilising items where loads are minimal
- Allows easy adjustment of length and tension via threaded ends
- Often used in marine and outdoor settings (non-critical uses)
- Suitable for DIY, agricultural, and light industrial applications
- Typically used where precision load control is not required
- Not intended for lifting, overhead loads, or safety-critical applications

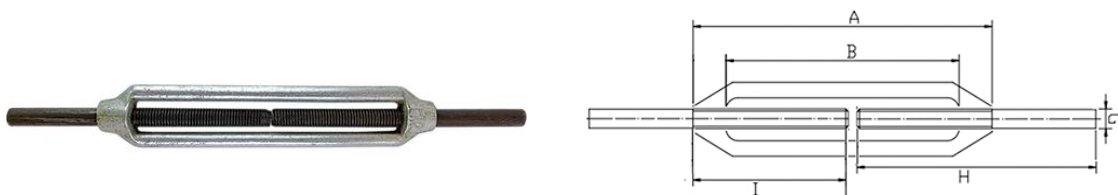

Specifications:

Bullivants Mfr No.	Size mm	A mm	B mm	H mm	I mm	G mm	Weight kg
WTB-U-120-SS-G-B	12	200	160	150	100	10.5	0.45
WTB-U-160-SS-G-B	16	230	180	180	120	14.5	0.89
WTB-U-200-SS-G-B	20	300	235	220	140	18	1.6
WTB-U-220-SS-G-B	22	320	250	250	165	20	2.2
WTB-U-250-SS-G-B	25	340	265	265	160	21.5	2.6

Not suitable for lifting