




Hot Dip Galvanising:

- Corrosion resistance (zinc coating protects steel) provides sacrificial protection ensuring the zinc coating corrodes instead of the base material.
- Longer service life, especially in outdoor or marine environments, also reduces the need for as frequent replacement and upkeep
- Full coverage, including threads and internal surfaces
- Provides resistance to abrasion and handling damage

Applications:

- Suitable for General Purpose fastening and securing applications, connecting chains, ropes or cable where lifting is not involved
- Temporary tie-downs for loads not being hoisted
- Suitable for use in barrier or partition set-ups
- Marine applications include attaching line, buoys, or anchors on non-critical loads
- Utility connections applications where failure would not pose a safety risk e.g. the load is not above the user or over valuable assets (signage/barriers)
- Available in Dee & Bow variations

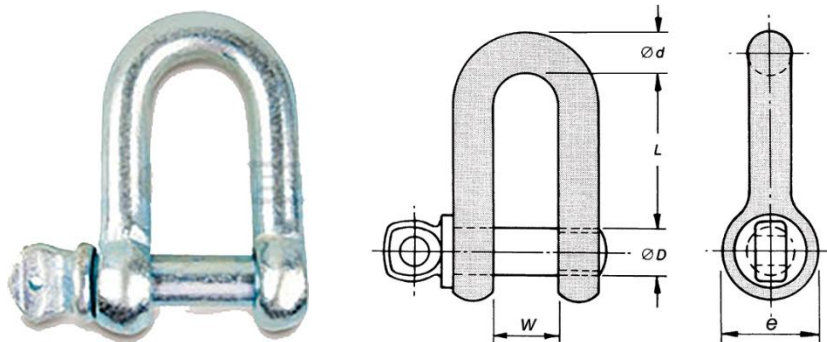

Specifications:

Bullivants Mfr No.	D mm	d mm	W mm	L mm	E mm	Weight Kg
WSU-050-D-G	5	5	10	19	11	0.019
WSU-060-D-G	6	6	13	25	14	0.034
WSU-080-D-G	8	8	16	32	18	0.07
WSU-100-D-G	10	10	19	38	20	0.13
WSU-120-D-G	12	12	25	51	26	0.24
WSU-160-D-G	16	16	32	64	33	0.5
WSU-200-D-G	20	20	38	76	40	0.8
WSU-220-D-G	22	22	44	89	50	1.3
WSU-250-D-G	25	25	51	100	57	2.0

Not suitable for lifting