

VWBG

Loading ring for bolting



Full WLL in any direction
with 4:1 design factor

Bolts 100% electro-magnetic
crack detection tested

KEY POINT 3
Easy assembly with a single
threaded tapped hole




Product features / VWBG Load ring



- ✓ Full WLL in any direction with 4:1 design factor
- ✓ Bolts 100% electro-magnetic crack detection tested
- ✓ High tensile suspension ring acc. EN 1677 - 4
- ✓ Easy assembly with a single threaded tapped hole
- ✓ Turnable under load
- ✓ VWBG is also available with UNC imperial thread sizes
- ✓ Surface protection CORRUD-DT (20 times better than zinc plating)
- ✓ Pink powder coating and zinc plated

TYPE	WLL [t]	A	B	C	D	E	F stand	F vario.	G	M stand.	M vario.	T	Wgt. [kg]	Torque [Nm]	Ref. No. stand.	Ref. No. vario.
VWBG 6	6	22	86	50	90	80	-	33-300	94	-	M33	208	5.6	350	-	8600150
VWBG 8	8	22	86	50	90	80	54	36-300	94	M36	M36-M39	208	4.67	410	7999059	8600451
VWBG 12	12	26	111	65	98	85	63	42-300	95	M42	M42-M45	234	6.1	550	7999044	8600452
VWBG 12	12	26	111	65	98	85	67	-	95	M45	-	234	6.24	550	7900455	-
VWBG 13	13	26	111	65	98	85	68	48-300	95	M48	M48-M52	234	6.37	550	7999045	8600453
VWBG 14	14	32	119	70	120	95	78	52-300	120	M52	M52	271	10.55	750	7901081	8600158
VWBG 16	16	32	119	70	120	95	84	56-300	120	M56	M56-M60	271	10.68	800	7999004	8600454
VWBG 16	16	32	119	70	120	95	94	64-300	120	M64	M64-M76	271	11.4	800	7999043	8600455
VWBG 31.5	31.5	46	130	90	170	145	108	72-300	159	M72	M72-M76	338	29.96	1200	7900097	8600456
VWBG 35	35	46	130	90	170	145	120	80-300	159	M80	M80-M85	338	31.19	1500	7900100	8600457
VWBG 40	40	46	168	110	170	145	135	90-300	159	M90	M90-M150	378	33.16	2000	7903408	8600458

Dimensions and specifications subject to change

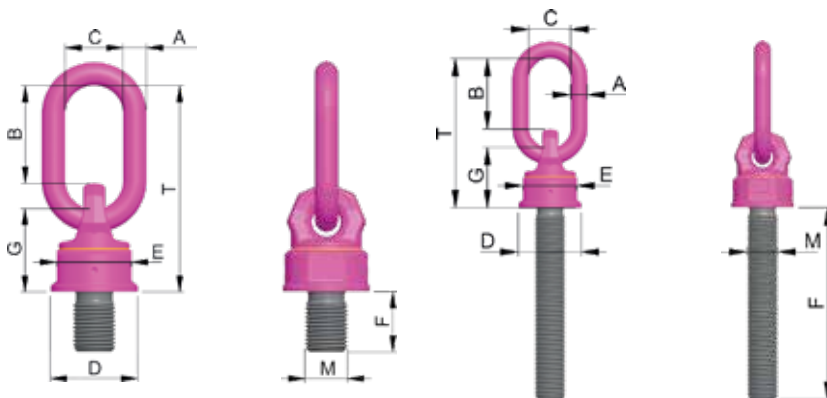

Distributed by **Bullivants**
1300 LIFTING info@bullivants.com