

Bullivants


Verotop E 2160 Grade



Verotop E 2160 Tensile Grade is a very flexible non-rotating rope with compacted outer strands with excellent fatigue life.

Main Features:

- Compacted non-rotating rope
- High breaking strength
- Excellent spooling behaviour on multi-layer drum
- Achieves very good bending fatigue results
- Offers excellent resistance to crushing and abrasion
- Can be used either with or without swivel
- Ideal for hoist ropes and auxiliary hoist ropes on mobile cranes and tower cranes
- Complies with AS 3569:2016

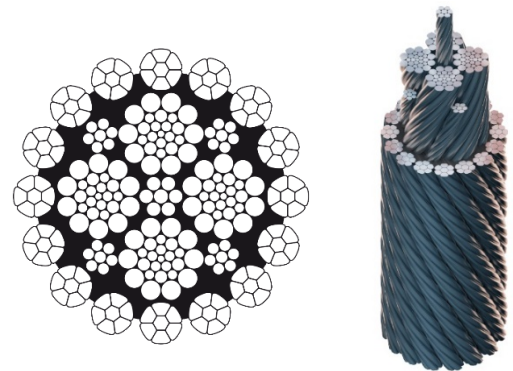

Specifications:

Bullivants Mfr No.	Diameter mm	Approx. Weight kg/m	Minimum Breaking Load kN
W0150QZEB	15	1.074	211.80
W0160QZEB	16	1.222	241.00
W0170QZEB	17	1.379	273.00
W0180QZEB	18	1.546	305.00
W0190QZEB	19	1.723	339.80
W0200QZEB	20	1.909	376.50

Applications:

Jib Crane: **Hoist Rope**




Overhead Crane:
Hoist/Auxiliary Hoist Rope




Ladle Crane:
Hoist/Auxiliary Hoist Rope



Luffing Crane: **Hoist Rope**

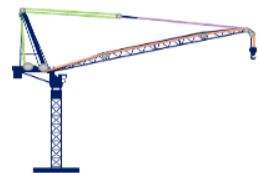

Tower Crane:
Hoist Rope

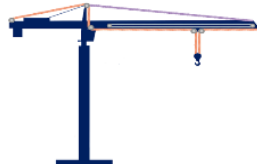

Truck Crane:
Hoist Rope

